


Magnet Grids

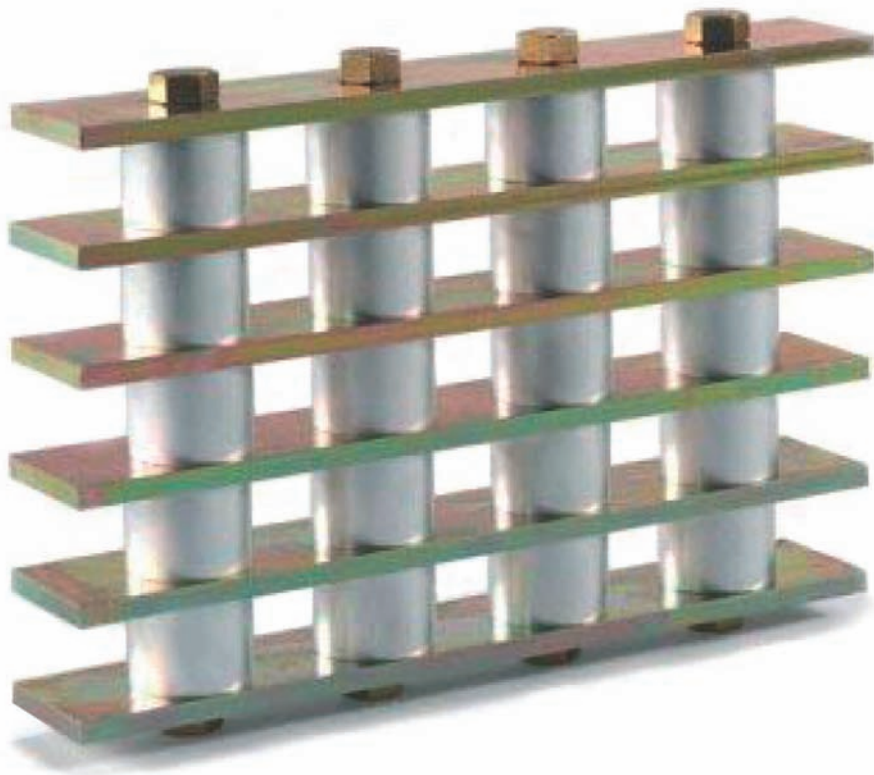

Magnet Grids

Enclosed Magnets for Extra Security

- Removes metal contamination from granules, regrind, powder etc.
- Prevents damage to machines and other equipment.
- Overcomes production downtime.
- An inexpensive insurance

Labotek hopper magnets are manufactured to a high specification suitable for applications such as injection moulding, blow moulding, profile, sheet film extrusion applications.

Metal contamination from granulator blades and other sources results in damage to screws, tooling, gearpumps, nozzles, hotrunners etc. which leads to expensive production downtime and repair costs.


Why take a chance when an inexpensive hopper grid magnet can overcome these types of problems.

A wide range of magnet sizes are available in rectangular, square or round format to suit all sizes of production machines.

Standard sizes

Rectangular

- 75x90 mm
- 100x120 mm
- 120x150 mm
- 150x165 mm




Square

- 100x100 mm
- 150x150 mm
- 180x180 mm
- 200x200 mm
- 250x250 mm
- 300x300 mm





Round

- Ø 150 mm
- Ø 180 mm
- Ø 200 mm
- Ø 250 mm
- Ø 300 mm
- Ø 350 mm

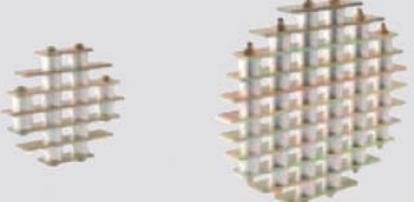

Other models and sizes on demand

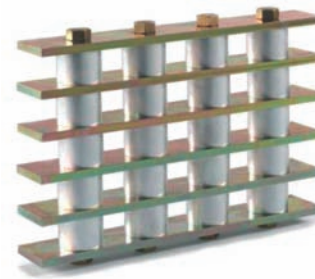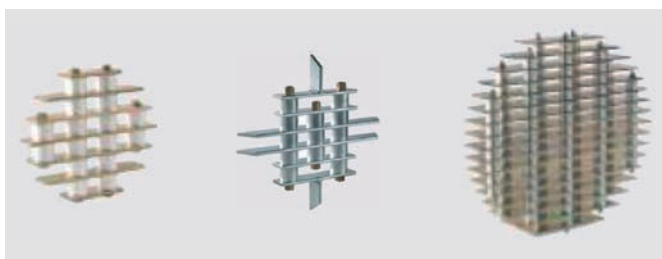

Rectangular



Square



Round



Others

Labotek A/S

Stroebjergvej 29, DK-3600 Frederikssund
 Tel +45 4821 8411 | Fax +45 4821 8000
info@labotek.dk | www.labotek.com

