




Your recycling needs. Our grinding solutions.

JM Series 15


Technical moulds, reinforced materials, no fine parts, minimum noise level, uniform regrind material, easy maintenance. The new JM Series 15 is suitable for runners recovery in-line with injection moulding machines and scraps.

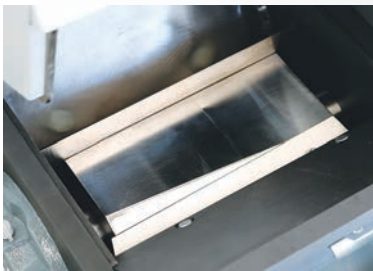


Solid rotor to grant a proper noise level in injection moulding department



Integrated funnel and screen-holder to get better dust-tight

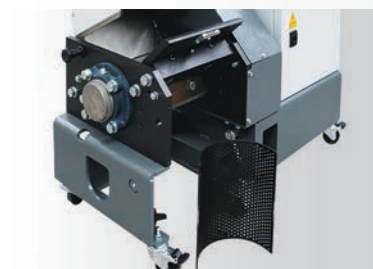

Grinding chamber in 550HV antiwear execution

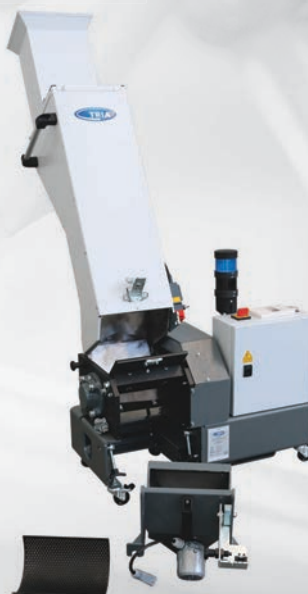

Easy and tool free access from one side only for ordinary maintenance



Easy to handle with limited lateral foot print to reduce the space between presses

JM Series 15

FEATURES JM 2115

Motor power : 1,5 kW
Feeding opening : 210x140 mm
N° blades /counterblades : 3/2
Rotor diameter : 150 mm
Standard screen : 5 mm
Indicative throughput : 10-20 kg/hr
Rotor speed : 300 rpm
Weight : 170 kg


FEATURES JM 4215

Motor power : 1,5 kW
Feeding opening : 420x140 mm
N° blades /counterblades : 3/2
Rotor diameter : 150 mm
Standard screen : 5 mm
Indicative throughput : 20-40 kg/hr
Rotor speed : 300 rpm
Weight : 230 kg

OPTIONAL


- A) Blades in antiwear execution
- B) Screen with anti-long holes Ø 5 mm
- C) Special voltages/frequencies
- D) Control level
- E) Venturi regrind material transport system
- F) Regrind material container

DIMENSIONS

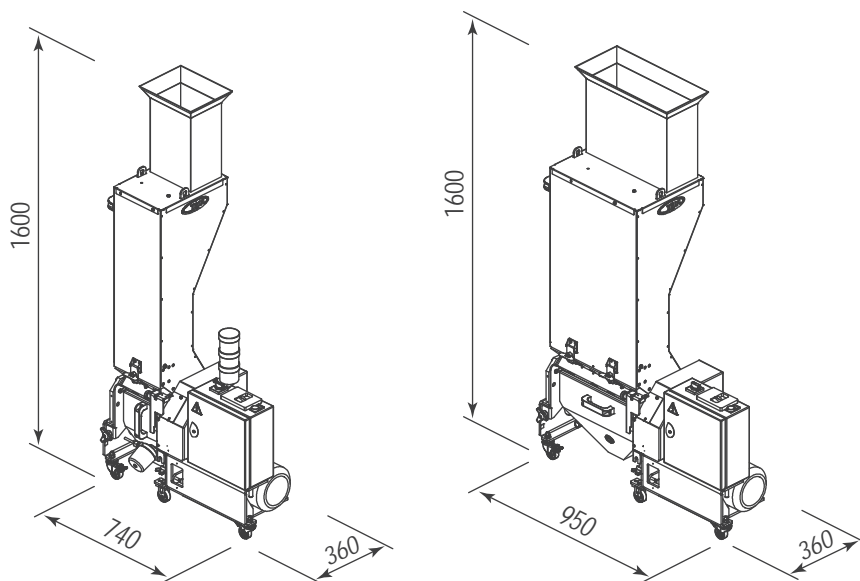


ACCESSORIES

Higher version for
box, bag or metallic
container

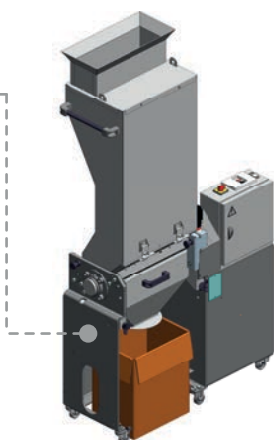

Lateral extraction
by compressed air

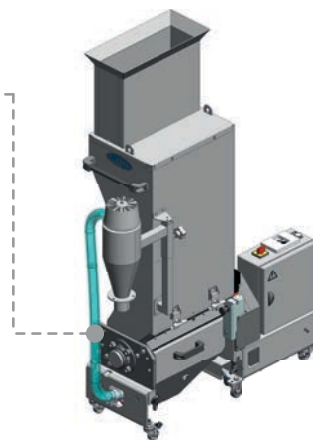

Your recycling needs. Our grinding solutions.

TRIA Italy
www.triaplastics.com

TRIA America
TRIA Brazil

TRIA China
TRIA Germany