


# System Components

Vacuum stations, Central filter systems,  
Vacuum receivers & Piping systems

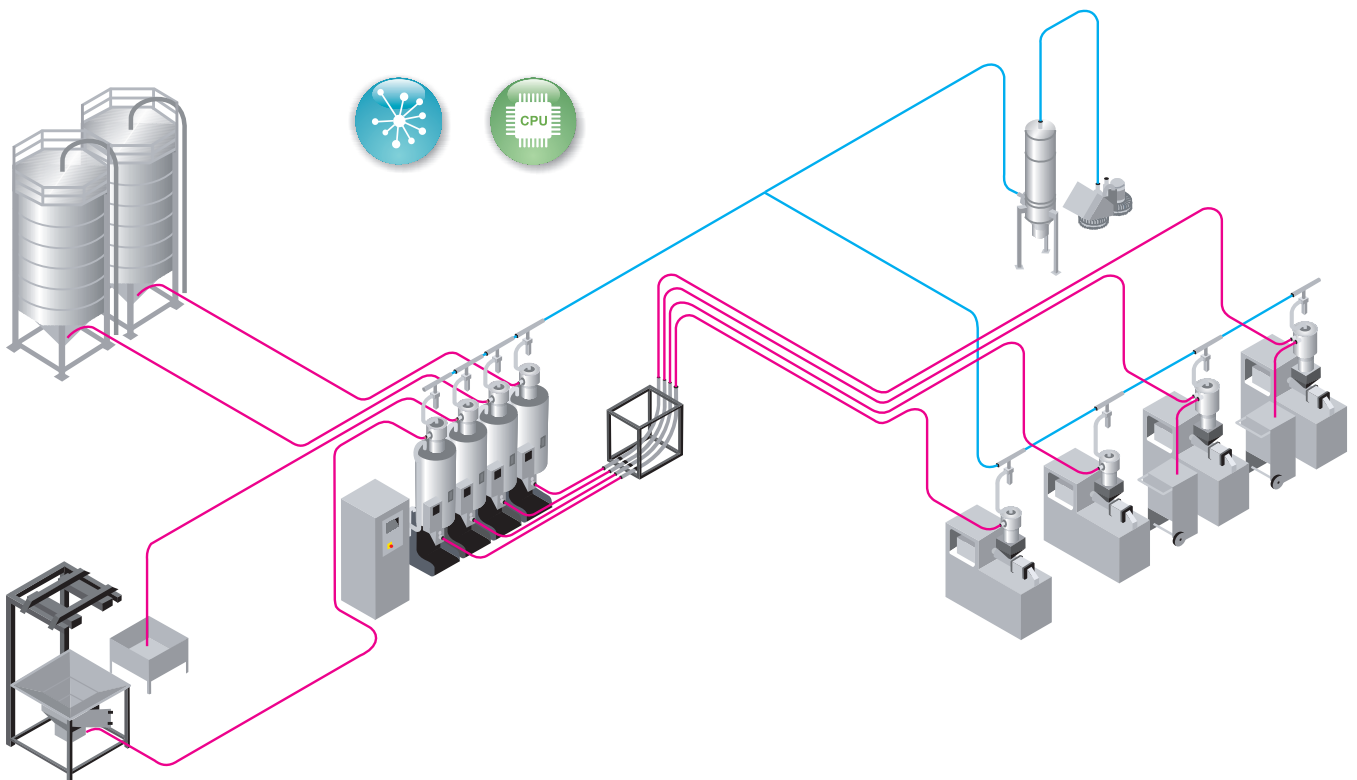

**Labotek**  
Power in Plastics

# System Components

## Introduction

Labotek centralised systems are recognized for their high level of durability and performance. Labotek's advanced technology offers frequency controlled vacuum stations and dust separation technologies reduce energy requirements dramatically.


Labotek systems are quiet, maintenance free and modularly constructed with one or two blowers connected in series that maintains a deep vacuum at low air speed. Vacuum receivers type SVR are supplied in stainless steel AISI 304, with spring return vacuum valves. Vacuum receivers from Labotek can be equipped with internal or external dosing valves for regrind.

## Vacuum Stations


Labotek Vacuum stations are used either as single, or double, or dry claw pump executions. This is in order to maintain a deep vacuum at lowest possible airspeed, achieving gentle conditions for the polymer being conveyed.

The blowers are maintenance free. Labotek blowers are available from 0.4 kW, with endless combination options.

Type	kW		A	B	C	D	E	G
LT3	0.4		498	290	240	420	184	Ø 11
LT4	1.1		475	265	290	420	225	Ø 11
LT5	1.3		665	395	340	375	260	Ø 11
LT6	3.4		685	430	390	425	290	Ø 11
LT12	4.0		580	467	410	403	330	Ø 11
LT18	5.5		580	618	410	387	330	Ø 11
LT5	1.3	BB	665	395	340	375	260	Ø 11
LT6	3.4	BB	685	430	390	425	290	Ø 11

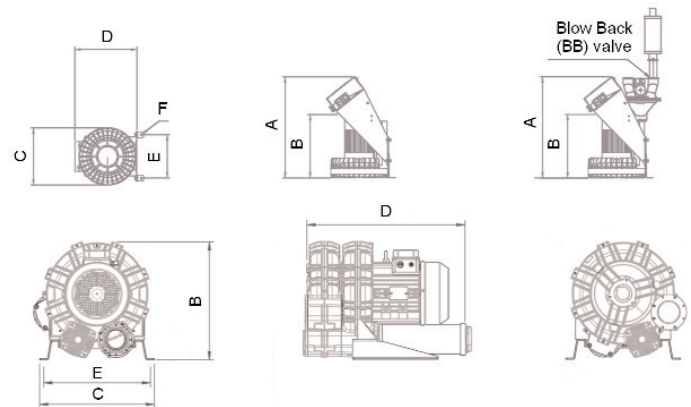

Type	A	B	C	D	E	F	G	H	I	Weight
CP 25	1144	515	449	1025	446	403	33	86	159	240
CP 30	1097	515	449	905	446	403	80	123	159	285
CP 40	1312	515	544	1025	446	403	33	86	144	320
CP 50	1312	515	544	1025	446	403	33	86	144	325

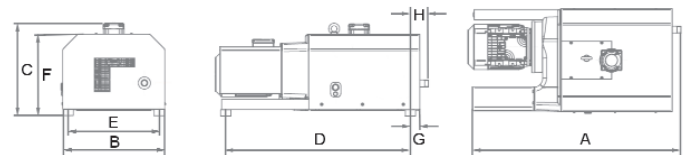

Part no.	Description	Fre- quency control	Mate- rial pipe
101700	SVS LT5 1.5 kW	No	Ø 38
101701	SVS LT6 3.4 kW	No	Ø 50
101713	SVS LT6 3.4 kW Blow Back	No	Ø 50
206760	Frequency Control up to 4 kW	Yes	
101732	SVS 5 kW CP25	No	Ø 50
101718	SVS 5 kW CP25 Blow Back	No	Ø 50
102270	SVS LT12 4.0 kW	Yes	Ø 50
102288	SVS LT18	Yes	Ø 65
102286	SVS LT18 Blow Back	No	Ø 65
102271	SVS LT12 4.0 kW Blow Back	Yes	Ø 50
101729	SVS CP25 5 kW	Option	Ø 50
101726	SVS CP30 6 kW	Option	Ø 50
206761	Frequency Control up to 7.5 kW	Yes	
101727	SVS CP40 7.5 kW	Option	Ø 65
101734	SVS CP50 9.2 kW	Option	Ø 65
206762	Frequency Control up to 11 kW	Yes	



Example vacuum station LT6

Example vacuum station CP30

## Frequency Inverters

Conveying air speed may be controlled via our frequency inverter range. The frequency controller is set in % air speed; herewith each station may have its own individual air speed setting, depending on material being conveyed.

Huge energy savings are obtained, raw materials are gently conveyed increasing the life span of pipe systems and hoses.

## Labo-Sync

The Labo-Sync technology allows more synchronous conveying cycles simultaneously. The major advantages are higher output and higher reliability, as there is always backup vacuum available. Other important parameter is significant energy savings through the use of frequency inverters maintaining the constant vacuum level required to convey to several vacuum receivers at the same time. Smaller vacuum receivers are also an obvious benefit from the Labo-Sync systems, which are offered with Labo-Net control systems.

## Central Filters

Labotek has four different filtration systems as standard. Processors may choose between either self purifying filter, dust cyclone, blow back valve, or compressed air filter cleaning.

Dust cyclone is used in medium to high dust applications, where a simple and efficient system is required. The dust cyclone is supplied with brackets for wall mounting.

Dust collectors are either 3, 10 or 20 litres.

Self purifying filter is selected where dust levels are high and processors are looking for a premium filter solution. The filter is supplied on floor stand with stainless steel filter construction, large filter surface and a quick purge system in base of filter for emptying of collected dust.

The Blow back valve is designed by Labotek; the valve changes the direction of the air stream, which turns the vacuum to pressure, which cleans the filter in the vacuum receiver after and/or before each conveying cycle.

At the same time the blow back valve enables a fast purge of the vacuum receiver after conveying cycle, resulting in higher conveying capacities.

## Cyclone & Selfcleaning Filter


Part no.	Ø	Description	A	B	C
204568	Ø 50	Cyclone 3 L	1117	861	325
204539	Ø 50	Cyclone 10 L	1117	861	325
204567	Ø 50	Cyclone 20 L	1117	861	325
208804	Ø 50	Self purifying filter	1840	1375	763
208805	Ø 65	Self purifying filter	1840	1375	763
208799	Ø 65	Self purifying filter	400	400	500



Compressed air filter cleaning




Dust Cyclone




Blow Back Valve



Self purifying Filter

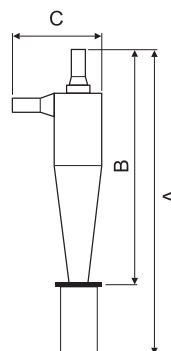

204568 - 3 L  
204539 - 10 L  
204567 - 20 L

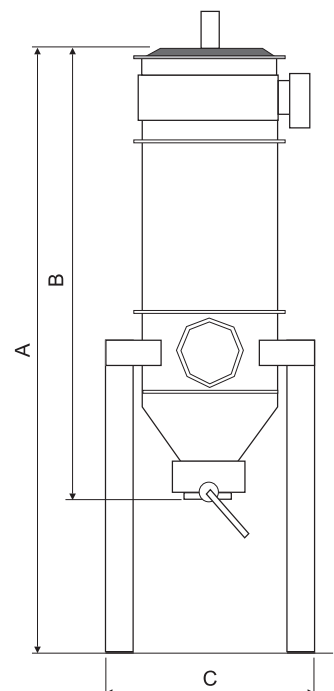




Vacuum Receiver SVR 1.5

## Vacuum Receivers

Labotek Vacuum Receivers type SVR are supplied in sizes from 1,5 litres up to 200 litres. The range is made in stainless steel grade AISI 304. Receivers are modular and allow users to change configuration as the requirements changes.

This receiver is among the most flexible available in the market. Level control in receiver is controlled via bottom flap magnet read switch, optionally the receivers may be equipped with high level sensor. The receivers have numerous filter types to select from, such as cartridges, coarse wire screens and others, enabling the receiver to adapt into almost any conveying application.



Mounting Pattern: SVR 1,5-50 L


Part no.	Description	Litres	A (mm)	B (mm)
208563	SVR 1.5	1.5	180	370
204564	SVR 4	4	245	530
204565	SVR 8	8	245	570
204566	SVR 16	16	310	650
204583	SVR 26	26	310	790
204593	SVR 50	50	310	1087
206825	SVR 50 / Ø 400	50	420	917
204627	SVR 75	75	420	1284
204628	SVR 100	100	420	1404
204629	SVR 150	150	600	1287
204630	SVR 200	200	600	1512

Labotek uses a unique vacuum valve which is remotely installed, separate from the vacuum receiver, hereby there are no pneumatic installations on the vacuum receiver. This gives an extremely simple and durable vacuum receiver design which is easy to clean and maintain.


The vacuum valve is fitted with large internal spring, which always secures a positive seal in the vacuum line, eliminating risk of vacuum leaks.



Vacuum Valve & EI-box



Vacuum receiver SVR 4-50



Mounting Pattern: SVR 75-200 L & SVR 50 / Ø 400



Vacuum receiver SVR 75-200



Local on/off



## IDV


The integrated Dosing Valve type IDV is a unique built-in dosing system for non critical proportioning of two materials into the same receiver.



SVR with IDV and Vacuum Valve

## RS2000

RS2000 is an external mounted proportioning valve, for non critical dosing of two materials into same receiver.



RS2000

The RS2000 unit is made in lightweight aluminium housing and features a glass window.

## Coupling Stations

A coupling station is used when a number of different raw materials are transferred to the same production machine.

Labotek coupling stations are available in numerous combinations, even with a control monitoring function.

All fittings are made in stainless steel AISI 304 or optionally in glass execution for minimizing wear, when conveying glass reinforced materials. Labotek coupling stations are tailored to each application, our unique pipe fittings are not welded together, making it possible to expand/replace single parts.

Labotek pipe supports are supplied in 40x40 square tube with holes made through flow drill technique, securing a tidy pipe installation where all pipes are fully aligned and secure.



Coupling station with optional control monitoring feature

## Piping Systems

Labotek piping systems are available in a number of different types of materials, based on standard pipe dimensions Ø 38, Ø 50 & Ø 65 mm, in either aluminium or stainless steel AISI 304.

Bends are made of stainless steel AISI 304, or alternatively of glass, if glass-reinforced raw materials are used.

Line cleaning valves and closed loop systems are used for the efficient emptying of pipes, protecting raw materials from absorbing unwanted moisture during conveying.




Example, Coupling station, 20 inlets/60 outlets


Coupling station examples




# Pipes and Fittings

Dimensions	Dim.	Alu	SS
Pipe L = 6 m	Ø 38	408203	408200
Pipe L = 6 m	Ø 50	408204	408201
Pipe L = 6 m	Ø 65	408205	408202

Bend 45°	Dim.	R	LT #
	Ø 38	250	544007
	Ø 38	500	544008
	Ø 50	250	544009
	Ø 50	500	544010
	Ø 65	500	544011
<b>Glass</b>			
	Ø 56*	500	544002

Bend 90°	Dim.	R	LT #
	Ø 38	250	544012
	Ø 38	500	544013
	Ø 50	250	544014
	Ø 50	500	544015
	Ø 65	500	544016
<b>Glass</b>			
	Ø 56*	500	544003

\*) Dimension to fit Ø 50 pipe

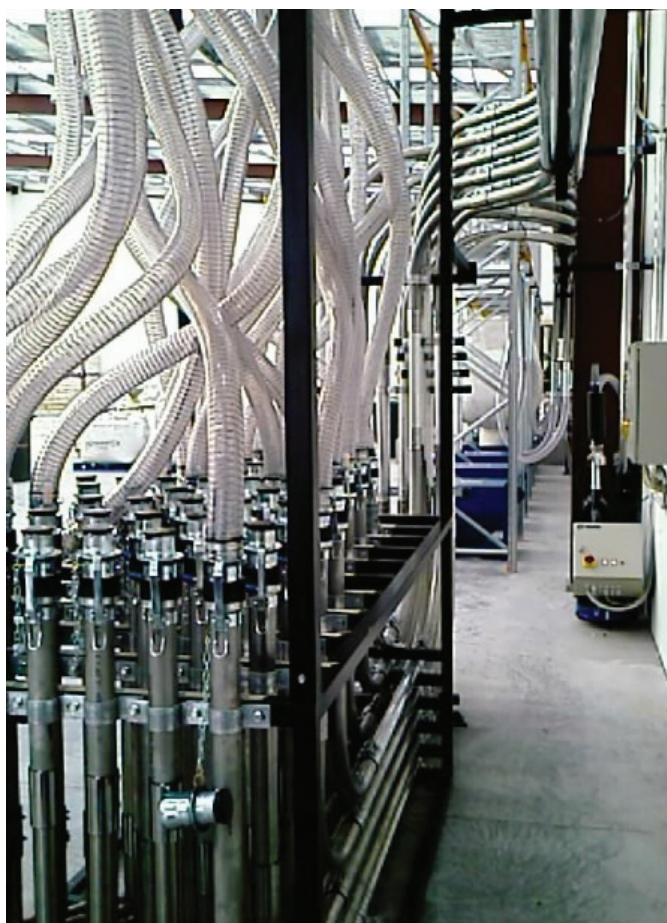

	Dim.	LT #
Coupling Station	Ø 50	207011
Coupling Station	Ø 65	207013
Coupling Station, Glass	Ø 50	207012



	Dim.	LT #
Pipe Cleaning Valve	Ø 38	203459
Pipe Cleaning Valve	Ø 50	203178
Pipe Cleaning Valve	Ø 65	203184



	Dim.	LT #
T-Branch	Ø 38	544019
T-Branch	Ø 50	544020
T-Branch	Ø 65	544021
T-Branch	Ø 50 / 65	544046



	Dim.	LT #
Pipe Coupling	Ø 38	501300
Pipe Coupling	Ø 50	501304
Pipe Coupling	Ø 65	544043
Pipe Coupling for Glass bend	Ø 56 / 50	544001



	Dim.	LT #
Quick Coupling	Ø 38	204711
Quick Coupling	Ø 50	204713
Quick Coupling	Ø 65	203864



	Dim.	LT #
Reduction Pipe	Ø 50 - 38	408304
Reduction Pipe	Ø 50 - 32	408306







Vacuum receivers type SVR and insulated hoppers

## Material Hoppers

Labotek manufactures a wide selection of Material hoppers in either square or round design, with raw material contact surfaces in stainless steel AISI 304.

The series are supplied in uninsulated and insulated versions, where 20 mm insulation thickness maintains material temperature while waiting on machine throat.

The range spans from 2 up to 200 litres as standard, however we are able to produce Material hoppers upon request.

The insulated Material hoppers also features sight glass lid prepared for Labotek vacuum receivers and standard flange for production machine. A purge valve is available as option.



**3 years  
warranty**

Labotek offers 3 years warranty  
- excluding wear parts

**Labotek A/S**  
Stroebjergvej 29  
DK-3600 Frederikssund

+45 4821 8411  
[info@labotek.dk](mailto:info@labotek.dk)  
[www.labotek.com](http://www.labotek.com)

Representative