
# Magnet Grids



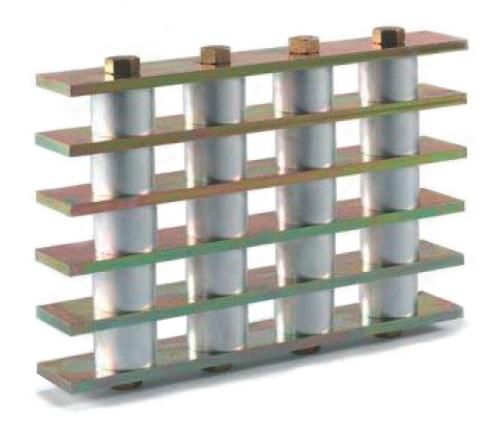

## Magnet Grids

#### **Enclosed Magnets for Extra Security**


- Removes metal contamination from granules, regrind, powder etc.
- Prevents damage to machines and other equipment.
- · Overcomes production downtime.
- An inexpensive insurance

Labotek hopper magnets are manufactured to a high specification suitable for applications such as injection moulding, blow moulding, profile, sheet film extrusion applications. Metal contamination form granulator blades and other sources results in damage to screws, tooling, gearpumps, nozzles, hotrunners etc. which leads to expensive production downtime and repair costs.

Why take a chance when an inexpensive hopper grid magnet can overcome these types of problems.

A wide range of magnet sizes are available in rectangular, square or round format to suit all sizes of production machines.


#### Standard sizes

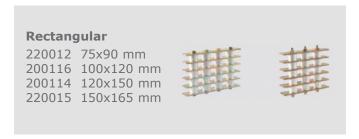

Square			
200324 220018 220019 220020	100x100 mm 150x150 mm 180x180 mm 200x200 mm 250x250 mm 300x300 mm	#	

Round			
	Ø 150 mm		- 111
220023	Ø 180 mm		<b>卡拉斯科拉</b>
220024	Ø 200 mm	1000	
220025	Ø 250 mm	The lates	- 中世代社
220026	Ø 300 mm	-1100-	在松松村
220027	Ø 350 mm		The same of the sa

### Other models and sizes on demand





Square



Others

Labotek A/S

Stroebjergvej 29, DK-3600 Frederikssund Tel +45 4821 8411 | Fax +45 4821 8000 info@labotek.dk | www.labotek.com



The specifications in this document are subject to change without notice. Magnet-grids-gb2